

HSAD16/125VDC S

- Two-port surge arresters type T3 for serial connection.
- Intended for protection of electronic appliances against the effects of switching, induced and residual overvoltage in DC power supply systems.
- Contains an improved thermal fuse which ensures timely disconnection of the device from the power grid during overheating and thus prevents damage.
- Activation of the thermal fuse is signalled by an integral indicator light.
- Installed at the boundaries of LPZ 2 – LPZ 3, as close as possible to the protected device (no further than 5 m).
- In front of HSAD16/*VDC S must be installed a lightning current and surge arrester T1 and T2 from HAKEL company.
- **S** indication specifies a version with remote monitoring.

Type		HSAD16/125VDC S
Test class according to EN 61643-11:2012 (IEC 61643-11:2011)		T3
System		DC
Rated operating DC voltage	U_N	125 V
Maximum continuous operating voltage DC	U_C	150 V
Rated load current	I_L	16 A
Open circuit voltage of the combination wave generator	U_{OC}	6 kV
Voltage protection level at U_{OC} (+/-)	U_p	< 0.5 kV
Voltage protection level at U_{OC} (\pm /PE)	U_p	< 0.8 kV
Nominal discharge current for class II test (8/20)	I_n	3 kA
Total discharge current (8/20) \pm ->PE	I_{Total}	6 kA
Response time (+/-)	t_A	< 25 ns
Response time (\pm /PE)	t_A	< 100 ns
Maximal back-up fuse		16 A gL/gG
Residual current	I_{PE}	$\leq 5 \mu A$
Short-circuit current rating at maximum back-up fuse	I_{SCCR}	6 kA _{rms}
Lightning protection zone		LPZ 2-3
Housing material		Polyamid PA6, UL94 V-0
Degree of protection		IP20
Operating temperature	ϑ	-40 ÷ 55 °C
Humidity range	RH	5 ÷ 95 %
Recommended cross-section of connected conductors	S	2.5 mm ²
Clamp fastening range (solid conductor)		0.2 ÷ 6 mm ²
Clamp fastening range (stranded conductor)		0.2 ÷ 4 mm ²
Tightening moment		0,5 Nm
Installation		On DIN rail 35 mm
Modular width		3 TE
Operating position		Any


Type	HSAD16/125VDC S	
Product placement environment	Internal	
Signalling at the device	Optic	
Importance of local signaling	OK – red light off FAULT – red light on	
Remote signalling	Yes	
Potential free signal contact (S) (recommended cross-section of remote monitoring max. 1 mm ²)	AC: 250 V / 1.5 A, DC: 250 V / 0.1 A	
Includes EMI / EMC filter	No	
Modular design	No	
Lifetime	> 100 000 h	
Designed according to standards		
Requirements and test methods for SPDs connected to low-voltage power systems	IEC 61643-11:2011	
Safety of Flammability of Plastic Materials	UL 94	
Application standards		
Protection against lightning	IEC 62305:2010	
Selection and erection of electrical equipment – Switchgear and controlgear	HD 60364-5-53:2022	
Selection and application principles for SPDs connected to low-voltage power systems	CLC/TS 61643-12:2009	
Ordering, packaging and additional data		
Mass	m	95 g
Mass (including the packaging)	m	119 g
Packaging dimensions (H x W x D)	60 x 113 x 73 mm	
Packaging value	V	0.5 dm ³
ETIM group	EG000021	
ETIM class	EC000942	
Customs tariff no.	85363010	
EAN code	8590681163283	
Art. number	30 293	



The link in the QR code leads to the online presentation of the HSAD16/125VDC S. There, in addition to the always up-to-date data sheet, you will also find all diagrams and drawings, declarations of conformity, or 2D or 3D models and other necessary materials. For more information, visit www.hakil.com



Application wiring diagram (installation)

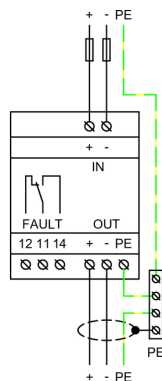

Internal diagram

